




Hex Shaft Style Data Sheet

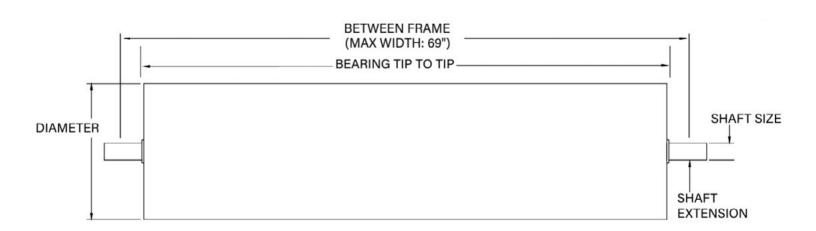

DIAMETER - 1.9"	
7/16 SHAFT ONLY	
16 ga Galvanized or Mild Steel .145 PVC	
Bearing Tip to Tip:	
Between Frame:	
Shaft Length:	
Shaft Style: C (No Shaft)	
CS (Pin Retained) CSS (Spring Loaded)	
QTY:	

DIAMET	FER - 2"	
7/16 SHAFT ONLY		
14 ga M	ild Steel	
Bearing Tip to Tip:		
Between Frame:		
Shaft Length:		
Shaft Style: C (No S CS (Pin Retained)	haft) CSS (Spring Loaded)	
OTY:		

DIAMETER - 2	.5″	
7/16 or 11/16 SH	IAFT	
14 ga or 11 ga S	teel	
Bearing Tip to Tip:		
Between Frame:		
Shaft Length:		
Shaft Style: C (No Shaft)		
CS (Pin Retained) CS	SS (Spring Loaded)	
QTY:		

11/16" SHAFT ADAPTORS
Utilize adaptors for sizes not listed or higher load requirements.
Face Width:
Between Frame:
Diameter:
QTY:

Company Name:	
NOTES:	

Tampa Location: 5010 16th Ave. S Tampa, FL 33619 (P) 813.247.3620

Moving people. Moving products. Moving the world.

Miami Location: 8700 NW 99th St. Miami, FL 33178 (P) 305.749.5966