


# Rubber Fabrication Specification Form

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Phone: \_\_\_\_\_


Date: \_\_\_\_\_  
 PO or Reference Number: \_\_\_\_\_

Belt Type: \_\_\_\_\_  
 Belt Length: \_\_\_\_\_  
 Splice Style: \_\_\_\_\_

- A. \_\_\_\_\_ Belt Width
- B. \_\_\_\_\_ Indent
- C. \_\_\_\_\_ Sidewall Height
- C1. \_\_\_\_\_ Foot In
- C2. \_\_\_\_\_ Foot Out
- D. \_\_\_\_\_ Sidewall Style
- E. \_\_\_\_\_ Clear Width
- F. \_\_\_\_\_ Cleat Height
- G. \_\_\_\_\_ Cleat Spacing
- H. \_\_\_\_\_ Cleat Style
- I. \_\_\_\_\_ Min. Pulley Dia.
- J. \_\_\_\_\_ Crate Needed (Y/N)
- K. \_\_\_\_\_ Sidewall Splice Kit Needed (Y/N)
- L. \_\_\_\_\_ Cleat Sidewall Attached (Y/N)
- M. \_\_\_\_\_ Sidewall Bolted to Belt (Y/N)

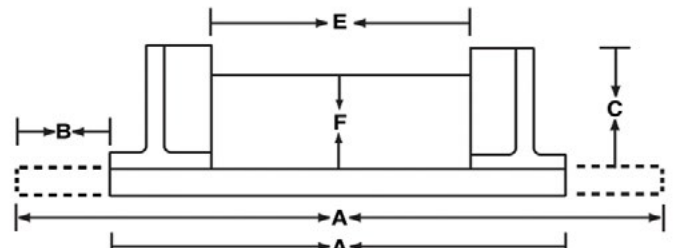

D - Example of Sidewall (foot out)

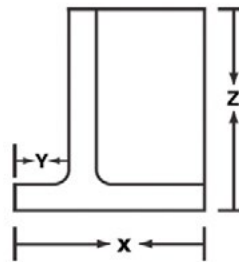

D - Sidewall Profile Styles (not to scale)

Style	X Base Width	Y Foot Size	Z Height Available
A	1 1/2"	1/2"	1"- 2"
B	2"	1/2"	2"- 4"
C	2 1/4"	1/2"	3"- 8"

Special Instructions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

## H - Cleat Styles

