
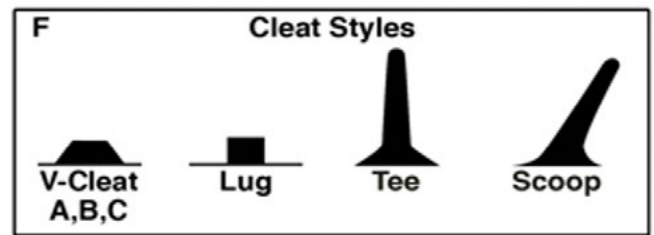


# Thermoplastic Fabrication Specification Form


Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Phone: \_\_\_\_\_

Date: \_\_\_\_\_  
 PO or Reference Number: \_\_\_\_\_

Belt Type: \_\_\_\_\_  
 Belt Length: \_\_\_\_\_  
 Belt Color: \_\_\_\_\_  
 Splice Style: \_\_\_\_\_  
 A. \_\_\_\_\_ Belt Width  
 B. \_\_\_\_\_ Indent  
 C. \_\_\_\_\_ Sidewall Height  
 D. \_\_\_\_\_ Clear Width  
 E. \_\_\_\_\_ Cleat Height  
 F. \_\_\_\_\_ Cleat Style  
 G. \_\_\_\_\_ Cleat Spacing  
 H. \_\_\_\_\_ Compound  
 I. \_\_\_\_\_ Min. Pulley Dia.

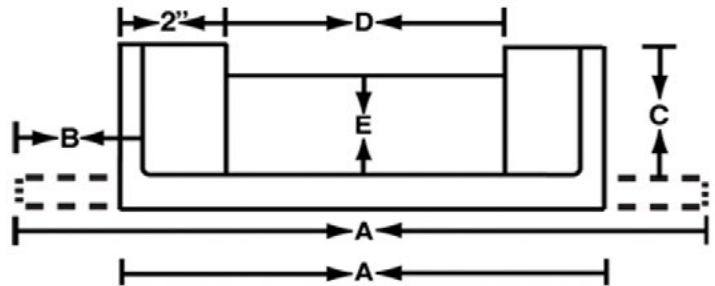

Special Instructions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

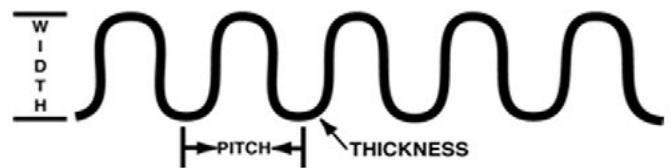

Weldwall Specifications		
Compound	RAV	Urethane
Color	White or Black	Clear
Thickness	.187 (3/16")	.187 (3/16")
Corrugation Pitch	2"	2"
Corrugation Width	2"	2"
Reinforcement	50 lb. Spun Polyester	None
Height	1" to 3"	1" to 3"
Base (If Loose)	2"	2"
Minimum Pulley	4" to 9" (Depending on Weldwall™ height)	